


TC 單動油壓缸



Thread-type Single Acting Hydraulic Cylinder

• Rod: $\phi 12$ - $\phi 25$ mm • Pmax: 500kg/cm²

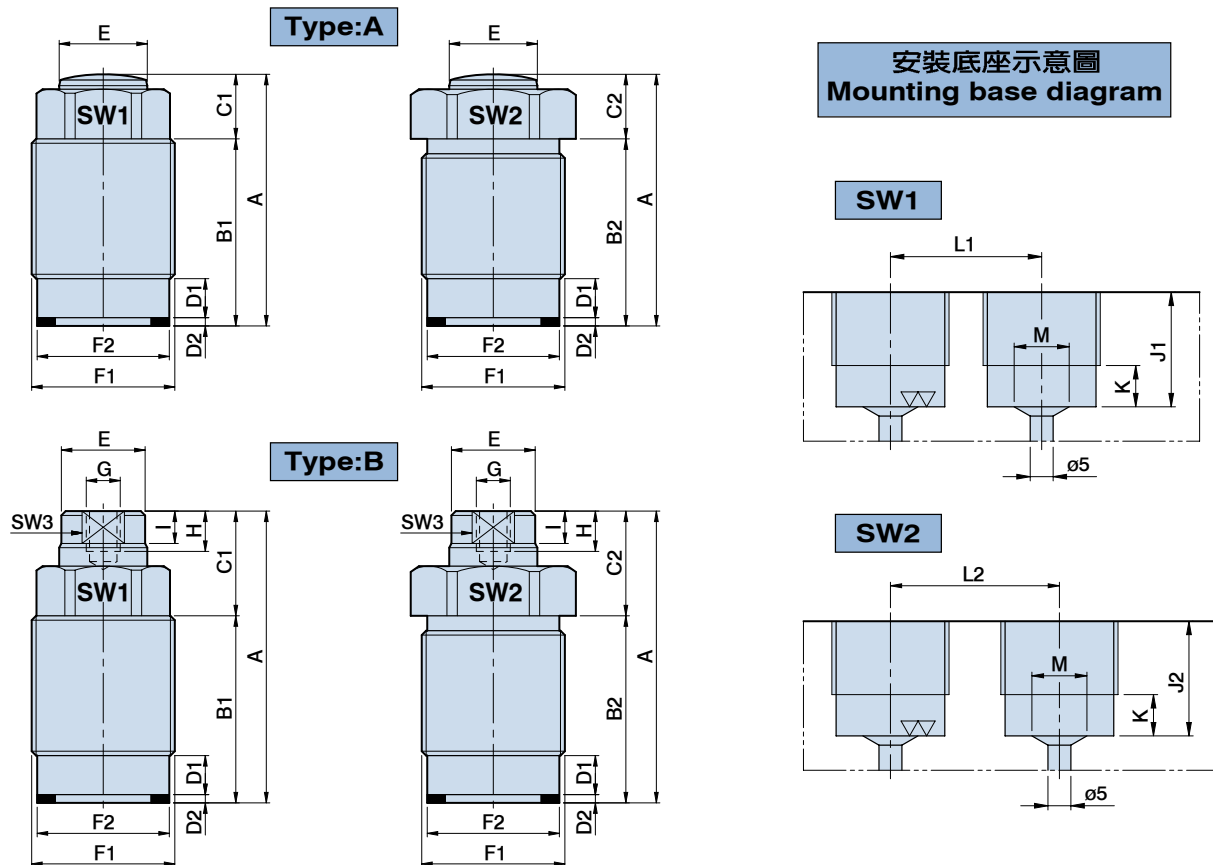

Dimensional table

UNIT:mm

ITEM	MODEL	TC-12A	TC-16A	TC-20A	TC-25A	TC-12B	TC-16B	TC-20B	TC-25B
A		38.5	47	56.5	60	45.5	53	66	69
B1		29.5	34.5	42.5	45	29.5	34.5	42.5	45
B2		26.5	34.5	42.5	45	26.5	34.5	42.5	45
C1		9	12.5	14	15	16	18.5	23.5	24
C2		12	12.5	14	15	19	18.5	23.5	24
D1		7	8	8	11	7	8	8	11
D2		1.5	1.5	1.5	2	1.5	1.5	1.5	2
E		$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 11$	$\phi 15$	$\phi 19$	$\phi 23$
F1		M22x1.5	M26x1.5	M30x1.5	M38x1.5	M22x1.5	M26x1.5	M30x1.5	M38x1.5
F2		$\phi 20$	$\phi 24$	$\phi 28$	$\phi 36$	$\phi 20$	$\phi 24$	$\phi 28$	$\phi 36$
G		—	—	—	—	M6x1.0	M6x1.0	M8x1.25	M8x1.25
H		—	—	—	—	7	7	9	9
I		—	—	—	—	5.5	5.5	6	7
J1	Min/Max	16.5 / 26.5	20.5 / 31	24.5 / 39.5	28.5 / 42	16.5 / 26.5	20.5 / 31	24.5 / 39.5	28.5 / 42
J2	Min/Max	16.5 / 25	20.5 / 33	24.5 / 42	28.5 / 44.5	16.5 / 25	20.5 / 33	24.5 / 42	28.5 / 44.5
K	Max	8	9	9	11	8	9	9	11
L1	Min	25	30	35	43	25	30	35	43
L2	Min	31	34	40	52	31	34	40	52
M	Min/Max	$\phi 9$ / $\phi 12$	$\phi 12$ / $\phi 16$	$\phi 14$ / $\phi 20$	$\phi 18$ / $\phi 25$	$\phi 9$ / $\phi 12$	$\phi 12$ / $\phi 16$	$\phi 14$ / $\phi 20$	$\phi 18$ / $\phi 25$
SW1		18	22	26	33	18	22	26	33
SW2		24	27	32	41	24	27	32	41
SW3		—	—	—	—	10	13	17	19